

Ice Cubers and Flakers

3M Water Filtration



3M™ ICE HF Range

Approximately 70% of ice machine equipment failures are water related. (Ice is composed of 100% water.)

Designed to reduce unscheduled service calls associated with corrosion, sediment and scale build up in commercial cubers and flakers.

Features

IMPACT media package in large cartridges

Built in scale inhibition

SQC™ (Sanitary Quick Change) cartridge

BSPT horizontal inlet and outlet ports

0.2 micron media

1.0 and 3.0 micron media

Valve-in-head

Optional pressure gauge

Certified to NSFstandard 53 for cyst reduction

Additional -S - SR and -S - SR5 products

Benefits

Higher flow rates, no need for manifold systems or for separate pre-filter and housing

Reduces the ability of calcium and magnesium to precipitate on the evaporator plates as hard scale

Allows fast and easy change-outs with a 1/4 turn while minimising the possibility of leakage and contamination

Allows direct or easily adaptable connections to existing plumbing lines

Reduces microbial content in water and protects customers from cyst and 99.9% of common pathogens

Combined sediment reduction with chlorine, taste and odour reduction for high dirt loading applications

No separate shut off valve required, easy to change using un-skilled staf


Easy to monitor filter blockage for identification of time to change filter

Independent qualification of performance and guarantee of product safety

For applications where biofilm is an issue



ICE-120-SE/125-S/140-S/145-S/160-S/165-S/190-S/195-S

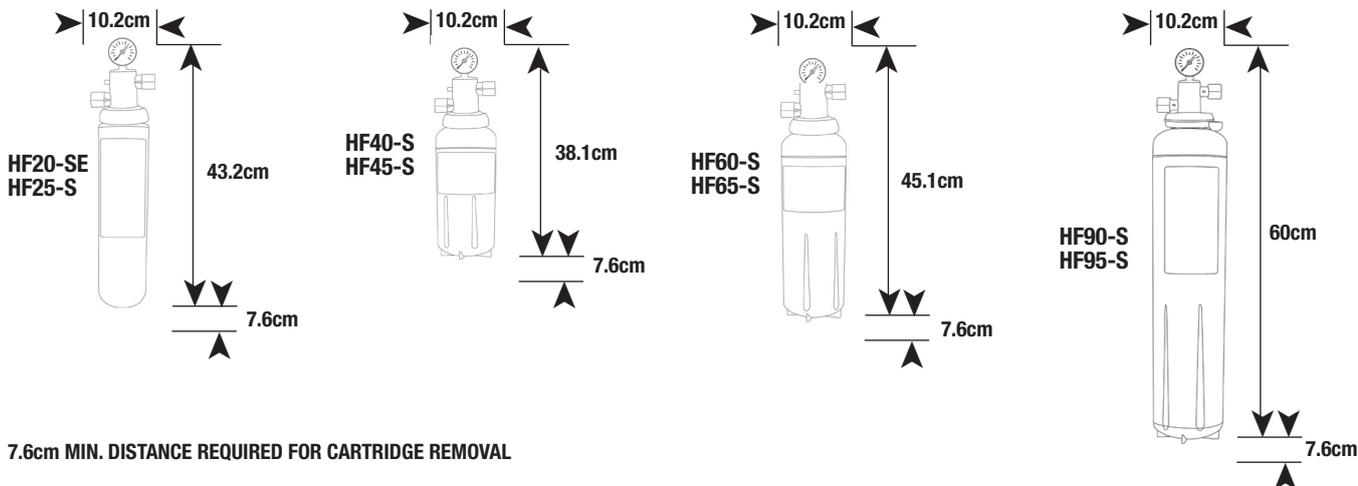

7.6cm MIN. DISTANCE REQUIRED FOR CARTRIDGE REMOVAL

3M™ Ice Range & Technical Specifications

Model/ System	Capacity litres	Micron Rating	Flow (lpm)	Water Application*	Components										Sizing(kg)	Impact NY/P**	
					Reduction Claims					Head			Cartridge				
					Chlorine taste & odour	Sediment	Cyst	Bacteria	Scale	Model	Connections	Part No.	Model	Part No.	Low flow cubers	High flow cubers	Flakers
ICE 120-SE	34,069	0.5	5.7	SWC	x	x	x		x	VH3G-BSPT	3/8"	70020121839	HF20-SE	XA 004809 332	340, 91, 544		
ICE 125-S	37,854	1.0	5.7	HTW	x	x			x	VH3G-BSPT	3/8"	70020121839	HF25-SA	70020020627A	340, 91, 544		
ICE 140-S	94,635	0.2	7.9	SWC	x	x	x	x	x	VH3G-BSPT	3/8"	70020121839	HF40-SA	70020121417	454, 272, 816		NY
ICE 145-S	94,635	3.0	7.9	HTW	x	x			x	VH3G-BSPT	3/8"	70020121839	HF45-SA	70020121425	454, 272, 816		P
ICE 160-S	132,489	0.2	12.6	SWC	x	x	x	x	x	NH3G-BSPT	1/2"	70020122035	HF60-SA	70020116706	659, 454, 1,089		NY
ICE 165-S	132,489	3.0	12.6	HTW	x	x			x	NH3G-BSPT	1/2"	70020122035	HF65-SA	70020020130	659, 454, 1,089		P
ICE 190-S	204,412	0.2	18.9	SWC	x	x	x	x	x	NH3G-BSPT	1/2"	70020122035	HF90-SA	70020020148	>659, 454, 1,089		NY
ICE 190-S-SR	204,412***	0.2	18.9	BF		x	x	x	x	NH3G-BSPT	1/2"	70020122035	HF95-S-SR	70020020767	>659, 454, 1,089		NY A3 KEY
ICE 190-S-SR5	204,412***	0.2	18.9	BF		x	x	x	x	NH3G-BSPT	1/2"	70020122035	HF95-S-SRS	70020020775	>659, 454, 1,089		NY A5 KEY
ICE 195-S	204,412	3.0	18.9	HTW	x	x			x	NH3G-BSPT	1/2"	70020122035	HF95-SA	70020121433	>659, 454, 1,089		P

*SWC = Standard water conditions; HTW = High turbidity water BF = where biofilm is an issue ** NY = Nylon membrane; P = Polypropylene pleated media *** Sediment capacity only A = ACS approved

Impact Technology

Integrated Membrane Pre-Activated Carbon Technology media combines a high surface area pleated media and a pre-activated carbon block in a single cartridge to dramatically reduce pressure drop, provide higher throughputs and longer cartridge life, while eliminating the need for pre-filtration.

This unique technology combines a pleated media prior to a high performance carbon block. In cyst rated units this allows sediment, cyst and bacteria reduction with chlorine taste and odour reduction in a single cartridge.

For the 0.2 micron rated products, water first flows through a patented multi-zone, pleated nylon membrane which provides exceptionally high surface area. The first zone – with larger openings – retains the large particles like sediment, rust and cysts. The finer second zone traps the smallest contaminants like bacteria and gives a final polish. Water then flows through a pre-activated carbon block to reduce chlorine taste and odour and other organics. The patented rigid block ensures that no carbon fines are released into the water.

For commercial use with cold water only. For all systems, heads and cartridges are sold separately. Head comes with integral mounting bracket.

Maximum operating pressure is 125psi. Inlet and outlet connections are female. NSF performance data sheet included except for -E products. Filter cartridges require no pre-activation and incorporate a carbon block media. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

Maximum operating temperature is 38°C.

Bacterial reduction by membrane filtration of 99.9% of common pathogens as tested with E.coli and Pseudomonas Fluorescens. NSF and CFR-21 certified for use for materials in contact with drinking water. Systems certified for cyst reduction may be used on disinfected water that may contain filterable cysts.

EPA Establishment Number 070595-CT-001 except -E products which are tested in accordance with NSF/ANSI Standard 42 for particulate reduction and chlorine taste and odour and where stated for NSF/ANSI Standard 53 for Cyst and Turbidity reduction. 3M recommends scheduled maintenance and replacement of the filter cartridge(s). Change the filter cartridge at least every 6 months.

3M cannot be liable for system failure due to improper maintenance.



Water Filtration
3M United Kingdom plc
 3M Centre,
 Cain Road, Bracknell
 Berkshire RG12 8HT
 Tel: 0845 602 5237
 Fax: +44 (0) 1344 858559
 www.3M.eu/purification

3M Ireland
 The Iveagh Building,
 The Park,
 Carrickmines,
 Dublin 18
 Tel: 1800 320 500

14801
 Please recycle. Printed in UK.
 © 3M 2012. All rights reserved.
 LITFSEUR0022 0212